

County of Louisa

Monthly Report



Louisa County Water Authority

June 2026



Background/History:

Louisa County Water Authority (LCWA) was created in 1968 by the Louisa County Board of Supervisors to engage in water and wastewater treatment in the County. The County has provided financial assistance as necessary since the Authority's inception as LCWA works to build a sufficient user and revenue base.

LCWA is comprised of several separate subsystems:

- The Northeast Creek Water Treatment Plant produces water for the Towns of Louisa and Mineral as well as surrounding areas, and utilizes conventional treatment followed by Nanofiltration. This plant uses raw water from the Northeast Creek Reservoir; treated water is delivered via a distribution system which connects end users outside of the Towns as well as Town-managed distribution systems within the Towns.
- The Regional Wastewater Treatment Plant, which is owned by the Town of Louisa and the County and serves the same areas as the Northeast Creek Plant above. LCWA operates this system under contract.
- The Zion Crossroads Water System consists of eight (8) potable production wells, and thirteen (13) monitoring wells and serves the Zion Crossroads/Ferncliff areas through a distribution system.
- The Zion Crossroads Wastewater Treatment Plant and collection system serves the same area as the Zion Crossroads Water System above.
- The Bowlers Mill raw water system is owned by the County and operated by LCWA to provide raw water to Old Dominion Electric Cooperative.
- The New Bridge System at Lake Anna provides water and wastewater services to the development area near Lake Anna on Rt. 208.

Projects, Maintenance and Action Items:

Northeast Creek Water Treatment Plant:

Decking around generator – Footers dug, concrete poured 01-04-2024	
Shower Replacement – acquiring quotes / estimates	
Continue to build critical inventory	
Security fencing around backwash tank	
Clear well cleaning – confined space entry	
Isolation valve replacement	
3 rd Nanofiltration skid	
Gate valve – discharge pit	
Backwash valve replacement	
Forklift	
Rebuild high service pumps	
VFDs on flocculators	
Float control valve	
Rewash flow meters	
Filter flow meters	
Chemical spill containment area work – engineer has evaluated	
Distilled water	
Raw line inserter valve	
Check valve at IDA	
HVAC and exhaust fan issues	
Safety Platform for plate settling system – being fabricated	
Plate settling system inspection trac #1 complete trac #2 to be completed later this year	
Concrete between basins is beginning to deteriorate – engineer has evaluated	
IDA tank washout – September 2026	
Replacing light fixtures in basement	
Disinfection byproducts sampling	
Loading dock drain - flooding from stormwater when it rains	
CIPs on Nanofiltration System	

Louisa Regional Wastewater Treatment Plant:

Water leak	
------------	--

Wet Well Fall Protection	
Implementing Optimization Study recommendations underway	
Continue to build critical inventory	
Acid bath tank for UV bulb cleaning	
Repair septage receiving flow reader – work is underway	
Gear box bearing for rotor in ditch #3	COMPLETE
Replace cloth disc filters	COMPLETE
Belt press overhaul	
New Gorman Rupp pumps for old influent building	
New chain for grit collector - ordered	
UV overhaul	
Metal building for tractor	
Vector Attraction Reduction testing on August 14, 2026	
Safety gate installed – electrical work in August 2026	
Asphalt repairs and sealed	COMPLETE
Replace suction line for Influent Pump Station	

Zion Crossroads Well System:

Negotiations with Fluvanna County on a rate to purchase water – agreement drafted	COMPLETE
Clean and paint Zion Crossroads Water Tank – interior – acquiring a price to send in divers	
PFAS sampling	COMPLETE

Zion Crossroads WWTP:

Cut drainage ditch and regrade slope behind generator and lab building	
Asphalt seal coat and repairs	COMPLETE
Security gate	
UV System upgrade – equipment is obsolete - underway	
Replace Influent pumps within the next two years	
Truck FY2027	COMPLETE
Xylem vertical turbine pump for inventory	
Roof over UV to protect exposed equipment from elements	
Replace return activated sludge (RAS) motor	
Replace reuse and effluent pumps	
Reuse down due to Spring Creek pump failure	
Check valve failure – working on replacement	
Effluent Pump #3 motor to be replaced – hit during a thunderstorm	COMPLETE
Vector Attraction Reduction testing in August 2026	COMPLETE

Dam work – Bowlers Mill and Northeast Creek:

Replace staff gauges (both)	
Lime spillways (both)	
Clear brush and trees 25' from dam (NEC)	
Fill and seed groundhog holes (both)	

New Bridge Water / Sewer System:

Shoreline Sign – being evaluated	
Build critical inventory	
Upgrade design and PER underway – 95% design completed	
Additional upgrades to maintain consistent compliance - underway	
Spare chemical; feed pump	
PFAS Sampling	COMPLETE
Hydro Tank maintenance in September 2026	
Pump wet wells August 20, 2026	

Distribution / Collection System:

Commercial Meter Replacement – received ¾," 1," 1 ½," and 2" meters and ERTZ - ongoing	
Bush-hogging rights-of-way (preparing for smoke testing) - ongoing	
Smoke testing	
St. Francis, Lagoon and High School pump station control panel replacement – ordered	
Ferncliff water / sewer line extension – currently four boring crews are working	
Replace pumps and motors at St. Francis Pump Station	
Crossing Pointe construction	

Truck for new maintenance employee FY2027	
Lagoon pump station water line installation	
Walmart / Stonegate manhole top section replacement	
Maintenance shop	
Fire hydrant and air relief valve replacement (water and sewer)	
6" Godwin pump with lay flat hose and fittings	

Miscellaneous:

Amazon	
Cybersecurity	
Safety Manual – rewrite / update	
Safety training	
Accounting Policies	
Regional Water Supply Planning	
American Water Infrastructure Act updates – 1 st set of documents submitted / 2 nd submission due 12/31/2026	
Asset Management / Mean time analysis	
Master Planning	

July Income & Expenditures:

The Authority's O & M Revenues exceeded O & M Expenditures by \$123,789 for the month of July 2026. The Authority has a positive O & M cash flow of \$123,789 for FY2027 through July 31, 2026.

Capital Revenues exceeded Capital Expenditures by \$394,986 for the month of July 2026. The Authority has a positive Capital cash flow of \$394,986 for FY2027 through July 31, 2026.

O & M and Capital Revenues together exceeded O & M and Capital Expenditures by \$518,776 for the month of July 2026. The Authority has a positive combined O & M and Capital cash flow of \$518,776 for FY2027 through July 31, 2026.

Fund Balance:


VIP Stable NAV Liquidity Pool **added Crossing Pointe connection fees to maximize interest while scheduling UV replacement at the Zion Crossroads WWTP**	\$1,087,059
VIP 1-3 Year High Quality Bond	\$875,158
Total Reserve Fund Balance (\$850,349 of these funds are restricted and not available for use in paying O&M Expenditures)	\$1,962,217

Restricted funds we are obligated to have on hand: **Included in the fund balance**


Customer Deposits	\$160,015
Accumulated Regional Sewer Connection Fees (restricted) less approved expenditures	\$528,268
Other Post-Employment Benefits	\$165,639

Production/Treatment Information:


Northeast Creek Water Treatment Plant - The permitted capacity sold is 277,033 gallons per day. The total permitted capacity is 1 million gallons per day. Average daily treatment in July 2026 was 430,421 gallons per day.

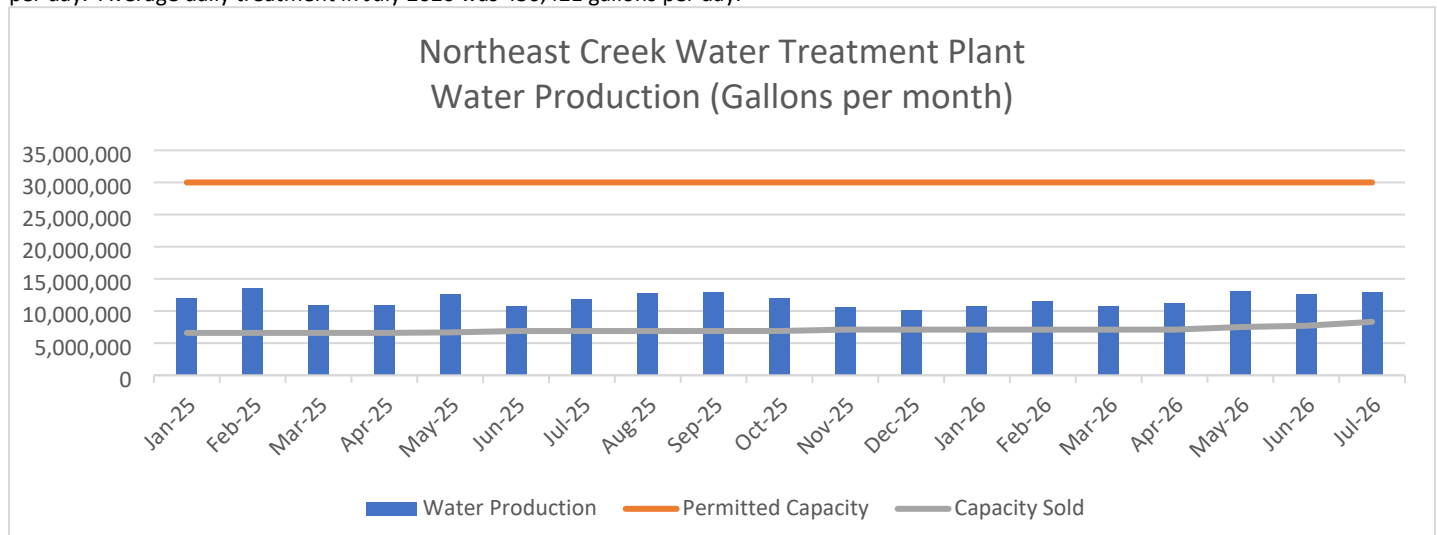


Louisa Regional WWTP - The permitted capacity sold or allocated is 524,000 gallons per day. The permitted capacity is 800,000 gallons per day. Average daily treatment 278,700 gallons per day in July 2026.

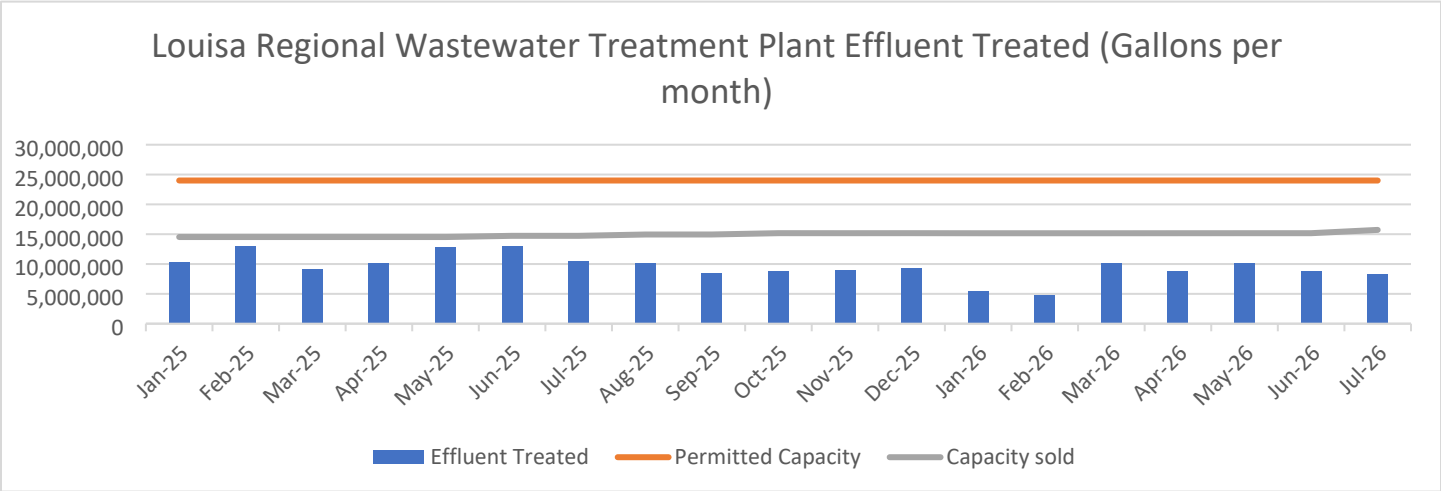

Zion Crossroads Well System - The permitted capacity sold or allocated is 326,000 gallons per day. The permitted capacity is 829,600 gallons per day. Average daily treatment is 243,069 gallons per day in July 2026. Increase in permitted capacity because permit was updated to include Spring Creek Wells #1 & #2 in February 2026.

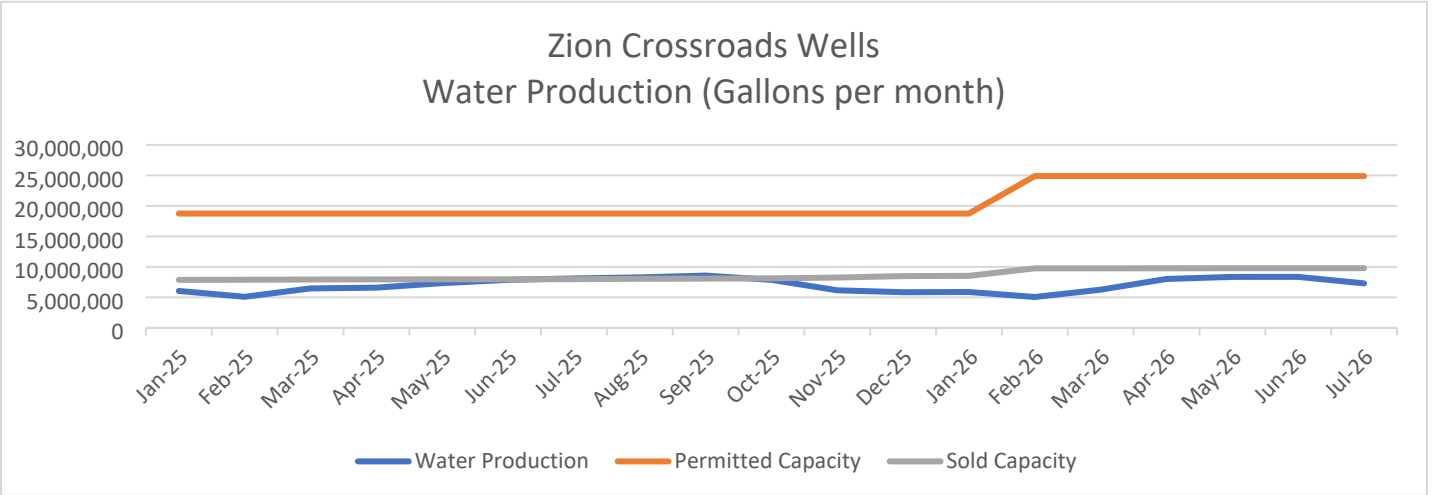



Zion Crossroads WWTP - The permitted capacity sold is 282,133 gallons per day. The permitted capacity is 311,000 gallons per day. Average daily treatment in July 2026 is 211,964 gallons per day .

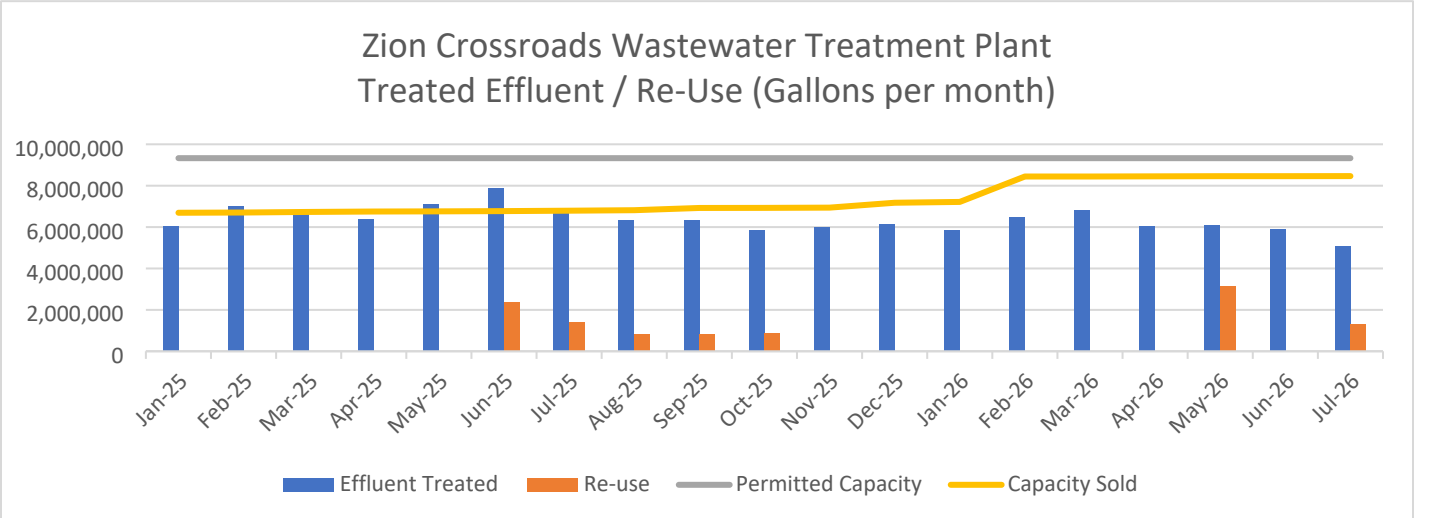

Nitrogen / Phosphorous:

Nitrogen and phosphorus are assigned limits on an aggregated Countywide basis which are set by the Department of Environmental Quality. Nitrogen and phosphorous each have a discharged limit (the amount discharged into the receiving stream) and a delivered limit (a calculation on the actual discharged amount that is delivered to the Chesapeake Bay).

In each graph below the gray line designates the permitted discharge amount; the blue column designates the actual discharged amount. The yellow line designates the permitted delivered amount; the orange column designates the actual delivered amount. In simplistic terms, the gray lines and blue columns go together, and the yellow lines and orange columns go together.

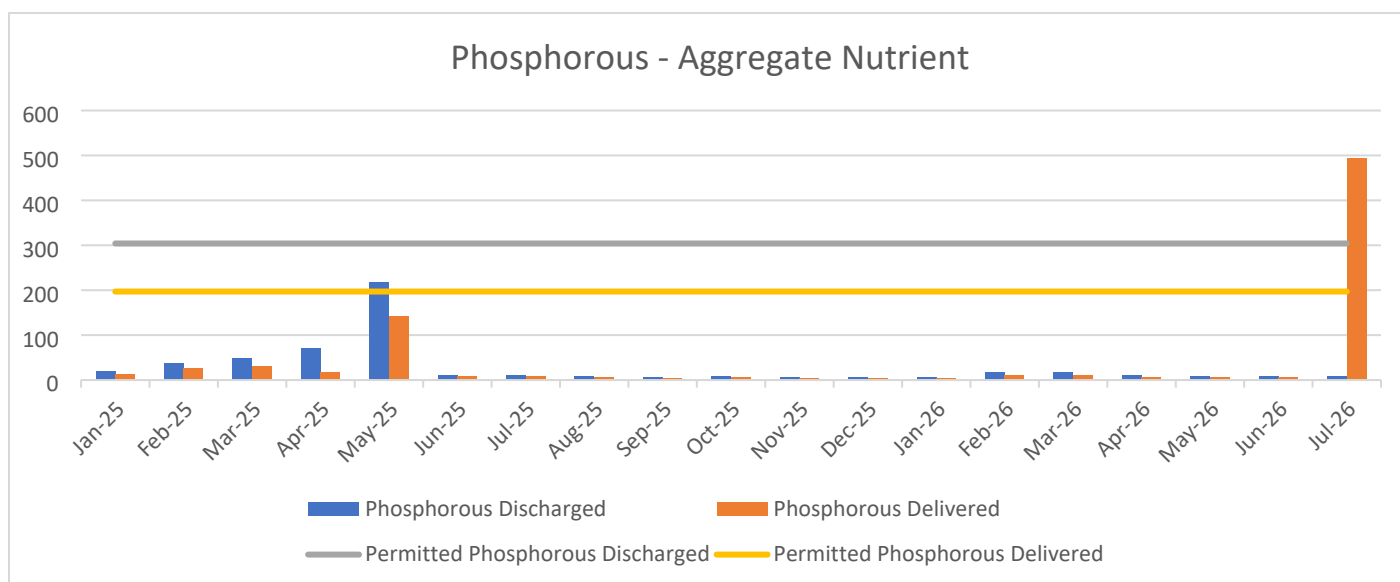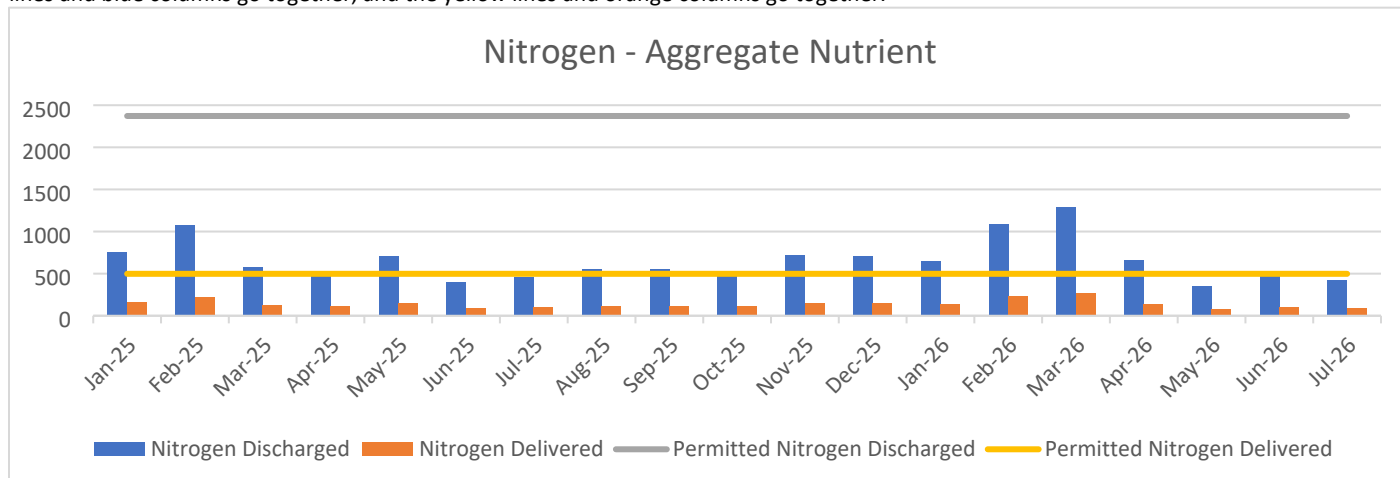

Total LCWA Connections:

Year	Number of Connections
2018	50
2019	26
2020	52
2021	64
2022	44
2023	38
2024	39
2025	52
2026*	46

*Through July 30, 2026